

WEBLOGGER

IBC ServeMaster Weblogger



PRODUCT ADVANTAGES:

Access from any webbrowser

Communication with modem, PC direct or LAN-network

Compact Flash® card

Alarm and status report via e-mail

EMC according DIN, CE


Measuremet data storage

Monitors up to 50 inverters

Graphical evaluation

Aluminium housing

Interfaces: RS 485, RS 232, LAN/Ethernet, Easylan

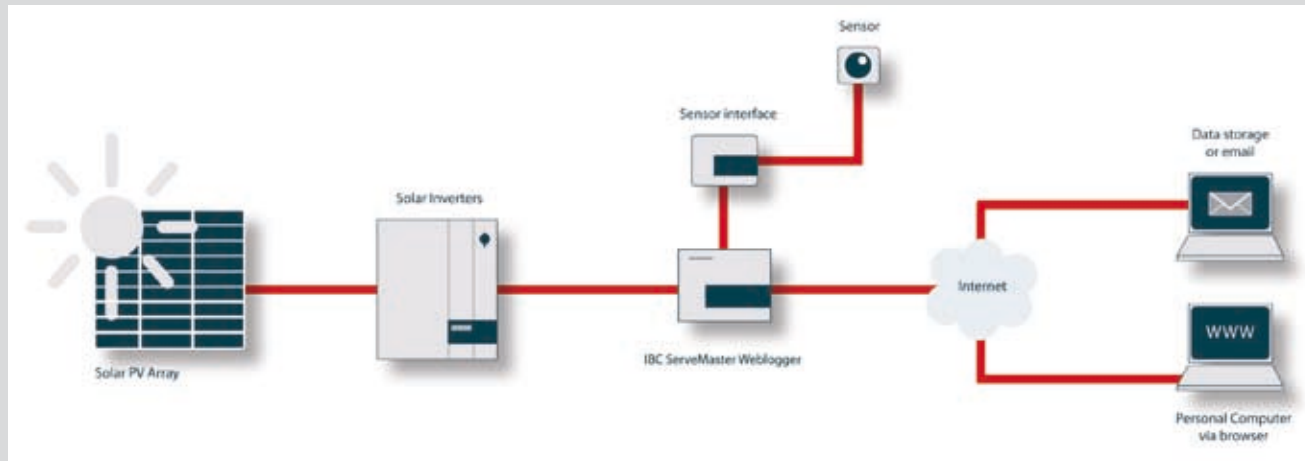

IBC ServeMaster Weblogger

TECHNICAL DATA

ServeMaster

ServeMaster	Weblogger
Number of inverters	50
Communication range	1000 m
Communication	Modem, GSM SUB-D9, Direkt via crosslink Kabel (Ethernet-PC Kabel) or LAN Netzwerke
External data storage	256 MB Compact Flash® card
Power Requirements	12 – 30 V DC power supply, 5 – 7 W
Indicators	1 red LED for event indication 7 green LEDs for production indication 3 LEDs on the multipoint connector Internal loudspeaker
Mechanical	2-part, non-ventilated metal (IP20)
Dimensions, including rear carrier rail adapter and multipoint connector	175 mm × 155 mm × 45 mm (W × H × D)
Weight	800 g (excl. Accessories)
Temperature range	0 °C ... +50 °C
Interfaces	RS485 RS232 LAN/Ethernet 10/100 Mbit full duplex) Easylan (Sensor interface)
Approval	CE

ServeMaster Sensorbox

Sensors	Irradiance PV module temperature Ambient Temperature Pulse Counter
Dimensions	110 mm × 60 mm × 25 mm (B × H × T)
Enclosure rating	Aluminium enclosure for indoor use (IP40)
Interfaces	4 analogue (16 bit) 2 Optical Digital inputs
Communication	Easylan (2 km)
Power Requirements	From the weblogger
Temperature Range	–10 °C ... +50 °C

Subject to modifications that represent progress.

06-2008