


INVERTER

IBC ServeMaster 10000 TL, 12500 TL, 15000 TL

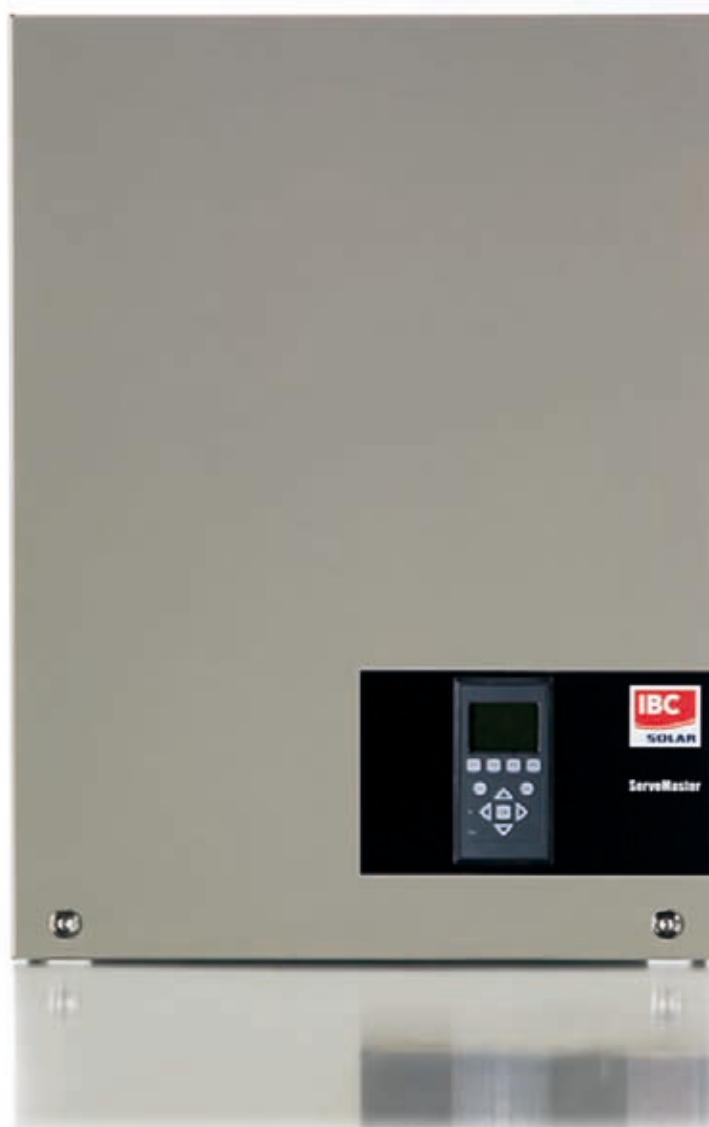

PRODUCT ADVANTAGES:

Three phase grid connection

Up to three individual DC string input

Master/Slave

Transformerless

98% Efficiency

High MPP tracker efficiency

■ 99,9% static

■ 99,4% dynamic

Ride Through technique

Integrated DC switch

Outdoor

TECHNICAL DATA

IBC ServeMaster		10000 TL	12500 TL	15000 TL
Specification				
Nominal power DC	W	10300	12900	15500
Max PV power	W	12000	15000	18000
Nominal power AC	W	10000	12500	15000
Max AC power	W	10000	12500	15000
Max efficiency	%	98	98	98
Euro efficiency	%	>97	>97	>97
Power factor		>0.97 an 20% load	>0.97 an 20% load	>0.97 an 20% load
Turn on power	W	20	20	20
Turn off power	W	15	15	15
Standby consumption	W	10	10	10
Night consumption	W	1	1	1
Voltages				
Nominal voltage DC	V	700	700	700
MPP voltage	V	250 – 800	250 – 800	250 – 800
Max DC voltage	V	1000	1000	1000
Turn off voltage DC	V	245	245	245
AC Voltage range	V	3 x 400 ±15%	3 x 400 ±15%	3 x 400 ±15%
Grid frequency	Hz	50 ±5	50 ±5	50 ±5
Currents				
Nominal current DC	A	2 x 12 (24)	3 x 10 (30)	3 x 12 (36)
Max current DC	A	2 x 15 (30)	3 x 12.5 (37.5)	3 x 15 (45)
Nominal current AC	A	14.7	18.3	22
Max current AC	A	14.7	18.3	22
Other				
Distortion (THD %)	%	<5	<5	<5
Dimensions (L x W x H)	mm	700 x 525 x 250	700 x 525 x 250	700 x 525 x 250
Weight	kg	30	30	30
Acoustic Noise level	dB (A)	50	50	50
Operation temperature range	°C	-25 ... 60	-25 ... 60	-25 ... 60
MPP efficiency	%	99.9	99.9	99.9
Overload operation		Change of operating point	Change of operating point	Change of operating point
Grid surveillance		Three phase monitoring	Three phase monitoring	Three phase monitoring
Mounting recommendation		Wall bracket	Wall bracket	Wall bracket
IP		IP54	IP54	IP54
Isolation monitoring		Included	Included	Included
Serial Communication		RS 485	RS 485	RS 485
Potential free contact		x 2	x 2	x 2
Sensor input		x 2 (temperature, irradiation)	x 2 (temperature, irradiation)	x 2 (temperature, irradiation)
Energy meter		S0 input	S0 input	S0 input
Normative references				
Directive LVD		73 / 23 / EC	73 / 23 / EC	73 / 23 / EC
Directive EMC		2004 / 108 / EC	2004 / 108 / EC	2004 / 108 / EC
Safety		EN 50178	EN 50178	EN 50178
EMC immunity		EN 61000-6-1 EN 61000-6-2	EN 61000-6-1 EN 61000-6-2	EN 61000-6-1 EN 61000-6-2
EMC emission		EN 61000-6-3 EN 61000-6-4	EN 61000-6-3 EN 61000-6-4	EN 61000-6-3 EN 61000-6-4
Utility interference		EN 61000-3-2/-3	EN 61000-3-12/-11	EN 61000-3-12/-11
Functional safety, anti-islanding		DIN VDE 0126-1-1	DIN VDE 0126-1-1	DIN VDE 0126-1-1
CE		Yes	Yes	Yes
Utility characteristics		IEC 61727 EN 50160	IEC 61727 EN 50160	IEC 61727 EN 50160
Italy		DK5940	DK5940	DK5940
Spain		RD1663	RD1663	RD1663
Article numbers		300103010000	300103012500	300103015000

Subject to modifications that represent progress.

07-2008