


Speciale cantiere

CODICE/ITEM/CODE	IL08LED	IL08RLED	IS750	IS749	IS747	WL400	IS180W
							
Alimentazione / Power supply / Alimentation	-	-	100-240V ~ 50/60 Hz	100-240V ~ 50/60 Hz	100-240V ~ 50/60 Hz	220/240V ~ 50 Hz	220V ~ 50Hz
Batteria / Battery / Batterie	4R25 6V (not included)	4R25 6V (not included)	-	-	-	-	-
Tecnologia della Luce / Light technology / Technologie de la lumière	2 Standard LED	2 Standard LED	2835 SMD LED	2835 SMD LED	2835 SMD LED	2835 SMD LED	COB LED
Potenza (W) / (W) Power / Puissance (W)	-	-	20W	20W	20W+20W	40W	80W
Consumo elettrico (W) / (W) Consumption / Consommation (W)	-	-	20W	20W	20W+20W	40W	80W
Portata / Range / Distance d'éclairage	N/S	N/S	N/S	N/S	N/S	N/S	N/S
Lumen / Lumen / Lumen	-	-	1400 Lm	1400 Lm	1400 Lm + 1400 Lm	2800Lm	5500 Lm
Autonomia / Runtime / Autonomie	+ 950 ore/hrs	+ 950 ore/hrs	-	-	-	-	-
Fascio di luce / Light beam / Type de faisceau	N/S	N/S	diffusa 120°	diffusa 120°	diffusa 120°	diffusa 100°	diffusa 105°
Tipo di luce / Kelvin degrees / Degrés Kelvin	-	-	6500 K	6500 K	6500 K	6500 K	6500 K
Durata di vita del LED / LED Life time / Durée de vie des LED	30.000 ore/hrs	30.000 ore/hrs	30.000 ore/hrs	30.000 ore/hrs	30.000 ore/hrs	30.000 ore/hrs	30.000 ore/hrs
Dimensioni prodotto / Product dimensions / Dimensions	335 x 185 x 75 mm	335 x 185 x 75 mm	350 x 185 x 156 mm	12 x 150 x 57 mm (faro/floodlight) 1755(h) x 870 x 57 mm (Tripod)	212,5 x 150 x 57 mm (faro/floodlight) 1780(h) x 870 x 57 mm (Tripod)	280 x 249 x 85 mm	344 x 116 x 312 mm
Materiale / Material / Matériau	PC	PC	ABS + AL	ABS + AL	ABS + AL	PC	AL+PC
Grado di protezione / Protection degré / Degré de protection	IP65	IP65	IP64	IP64	IP64	IP44	IP54
Cavo / Cable	-	-	1,5 mt	3 mt	3 mt	Cavo/Cable 1,8 mt	Cavo/Cable 5 mt
Accessori / Accessories / Accessoires	Staffa di fissaggio, gancio	Staffa di fissaggio, gancio	-	-	-	2 prese shuko max 2000W / 2 shuko sockets max 2000W	1 presa shuko max 3000W / 1 shuko socket max 3000W Bluetooth speaker
Peso netto / Net Weight / Poids net	482 g	482 g	934 g	3074 g	3783 g	1805 g	3900 g

IL08LED

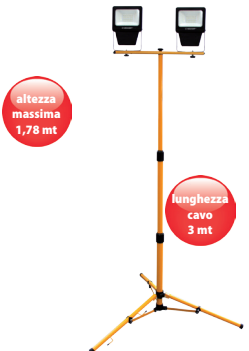

IL08RLED



IS750



IS749



IS747



WL400



IS180W



PACKING	INNER	MASTER
	pcs	pcs
Bulk	10	10

PACKING	INNER	MASTER
	pcs	pcs
Bulk	10	10

PACKING	INNER	MASTER
	pcs	pcs
Colour box	-	3

PACKING	INNER	MASTER
	pcs	pcs
Colour box	-	4

PACKING	INNER	MASTER
	pcs	pcs
Colour box	-	2

PACKING	INNER	MASTER
	pcs	pcs
Colour box	-	4

PACKING	INNER	MASTER
	pcs	pcs
Colour box	1	4