


ENERGY FOR YOU...



SK-038 42 Příbovce 343
Tel.: +421/43/42 94 466
Tel.: +421/43/42 94 916
Fax.: +421/43/42 94 026
E-mail: tts@tts-martin.sk
www.tts-martin.sk

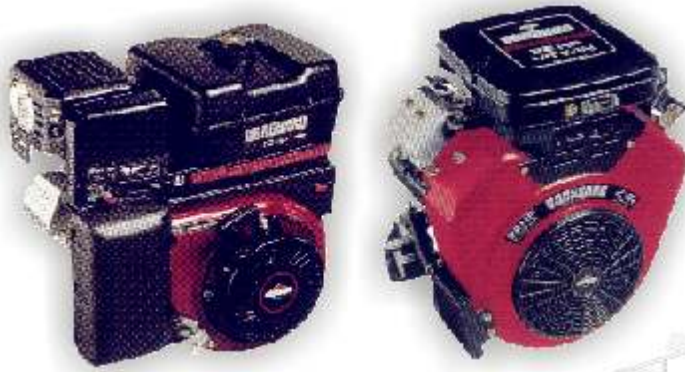


Petrol engine BRIGGS&STRATTON

Base power range from 1,5kVA within 12,7kVA

Nominal speed / frequency: 3000min⁻¹ / 50Hz

Air cooled engine

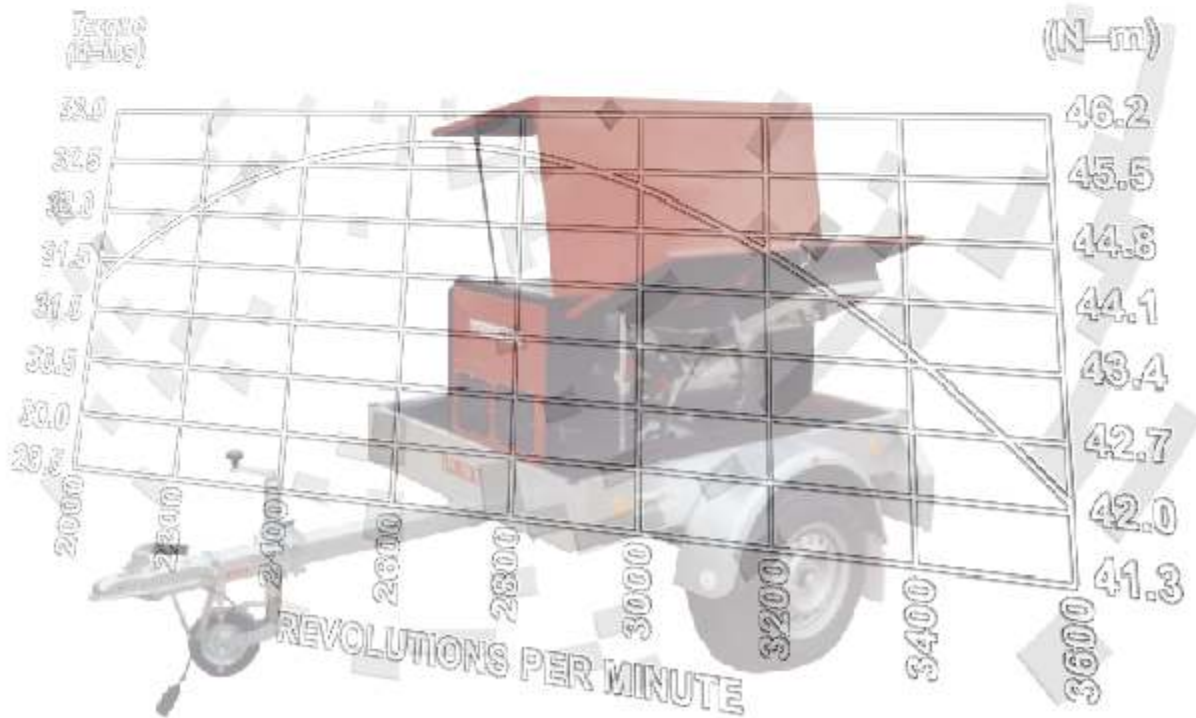

GENSET TYPE	MAX. POWER (kVA / kW)	PRIME POWER (PRP) (kVA / kW)	ENGINE TYPE	NOMINAL VOLTAGE (V)	STARTING	FUEL CONSUMPTION (PRP) (L/h)	FUEL TANK VOLUME (L)	BASE UNIT DIMENSIONS (L / W / H) (mm)	BASE UNIT WEIGHT (kg)	CANOPIED UNIT DIMENSIONS (L / W / H) (mm)	WEIGHT 100LWA (kg)
HANDY MP16	1,6 / 1,3	1,5 / 1,2	Industrial plus 3,5HP	230	recoil	1,3	3,8	550/350/475	26	--	--
HANDY MP24	3,0 / 2,4	2,8 / 2,2	Intek OHV 5,5HP	230	recoil	1,7	3,8	570/350/510	33	--	--
HANDY MP48	5,5 / 4,4	5,0 / 4,0	Vanguard OHV 9HP	230	recoil	2,9	7,9	720/580/510	54	1200/700/810	129
HANDY MP48 T	5,7 / 4,6	5,2 / 4,2	Vanguard OHV 9HP	3 x 230/400	recoil	2,9	7,9	720/580/510	65	1200/700/810	145
HANDY MP67	7,5 / 6,0	6,8 / 5,4	Vanguard OHV 13HP	230	recoil	3,7	7,9	720/580/510	69	1200/700/810	149
HANDY MP67 T	7,8 / 6,2	7,1 / 5,7	Vanguard OHV 13HP	3 x 230/400	recoil	3,7	7,9	720/580/510	78	1200/700/810	158
HANDY MP48 E	5,5 / 4,4	5,0 / 4,0	Vanguard OHV 9HP	230	electric	2,9	7,9	720/580/510	61	1200/700/810	145
HANDY MP48 TE	5,7 / 4,6	5,2 / 4,2	Vanguard OHV 9HP	3 x 230/400	electric	2,9	7,9	720/580/510	70	1200/700/810	150
HANDY MP67 E	7,5 / 6,0	6,8 / 5,4	Vanguard OHV 13HP	230	electric	3,7	7,9	720/580/510	69	1200/700/810	149
HANDY MP67 TE	7,8 / 6,2	7,1 / 5,7	Vanguard OHV 13HP	3 x 230/400	electric	3,7	7,9	720/580/510	78	1200/700/810	158
BOXER MP101 E	9,9 / 7,9	9,0 / 7,2	Vanguard OHV 16HP	230	electric	4,5	20	990/540/670	101	1200/700/810	164
BOXER MP101 TE	10,2 / 8,2	9,3 / 7,4	Vanguard OHV 16HP	3 x 230/400	electric	4,5	20	990/540/670	97	1200/700/810	160
BOXER MP120 E	13,6 / 10,9	12,4 / 9,9	Vanguard OHV 22HP	230	electric	6,7	20	990/540/670	114	1200/700/810	171
BOXER MP120 TE	14,0 / 11,2	12,7 / 10,2	Vanguard OHV 22HP	3 x 230/400	electric	6,7	20	990/540/670	108	1200/700/810	171

Options:

- retention bath for genset without canopy
- additional exhaust silencer
- fast trailer
- trailer for slow towing
- trailer for moving manually
- remote genset monitoring and control
- engine heating
- wall fuel tank 20L
- external fuel tank 20L

For genset installed in canopy standard 40L fuel tank